

A study on readback channel of Perpendicular Magnetic Recording system

Magnetic readback channel is a high-correlated ISI channel. By using modern digital signal processing techniques and channel coding schemes, the recording density of hard disk drive has been growing rapidly. In this report, we will summarize the readback channel model of Magnetic Recording systems, especially focus on the widely used perpendicular recording systems. The report will first give a full picture about the magnetic recording systems. Then, we will discuss the simplified readback channel model of perpendicular magnetic recording systems, including the electronic noise and media noise.

1. Magnetic recording systems

Partial Response Maximum Likelihood (PRML) system is now a de facto standard in the HDD industry[1]. Fig. 1 is a generalized diagram for the magnetic recording system.

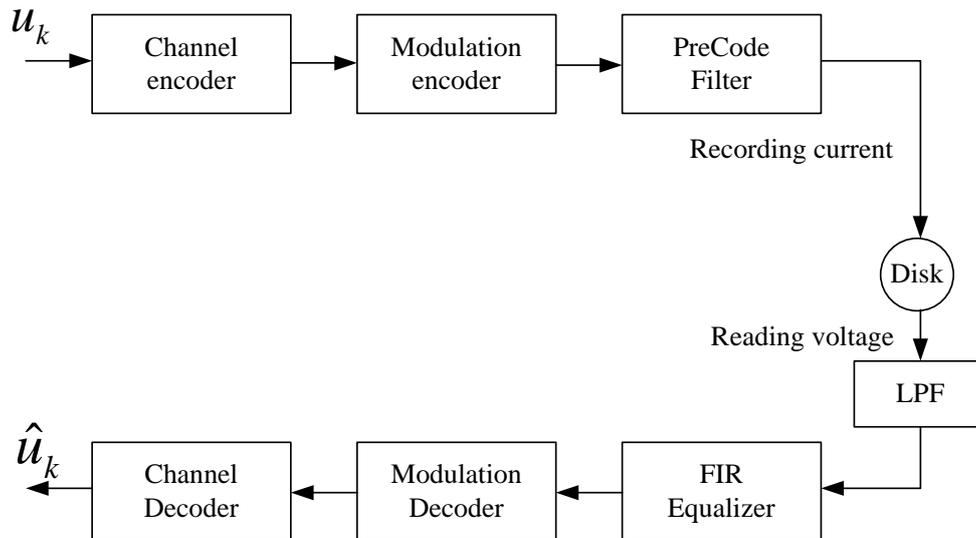


Fig. 1 A generalized diagram for magnetic recording system

In the magnetic recording system, the data bit stream u_k is first encoded by the channel encoder. After adding some parity bits, the coded bit stream passes the modulation encoder to add some constraint on the coded bit stream to facilitate the time recovery and bit detection. Then, the bit stream is filtered by a low-pass filter called precode filter to transform the transition status of the modulation encoder to the recording current (There is a postcode filter in the modulation decoder block functioning reversely). After the precoder, the data is recorded on the disk.

In the readback progress, the data stream first pass a low pass filter after it is read out from the disk. Then, the data stream enters the FIR equalizer. It detects the bit stream, including time recovery, signal detection. One of the most important parts, which is also the one we may be interested, is PRML detector. There are various kinds of PRML detectors, such as PRML, PR4ML, EPR4ML, and generalized PRML[2, 3]. The generalized polynomial form of PRML detector is $g(D) = (1 - D^2)(1 + c_1D + c_2D^2 + \dots)$. The coefficients, called targets of PRML are determined by the system design, such as the recording density, readback head and so on. The main function of the PRML detector is following: shortening the length of response in order to reduce the ISI; performing the maximum-likelihood detection of the channel response. Noise Predictive Maximum Likelihood (NPML) detector[4] is state of art. The estimated data stream is then decoded sequentially by the modulation decoder and channel decoder. Finally, the data \hat{u}_k is read out.

2. Readback channel model of perpendicular magnetic recording

The readback channel of magnetic recording systems is dependent on read head, magnetic materials, recording density, and inputting data and so on. In this section, we briefly introduce the major noises appear in the readback channel of perpendicular magnetic recording(PMR) system with high recording density, and then give a simplified channel model of the PMR based on the GMR head, thin-film materials.

There are mainly two kinds of noise existing in the magnetic recording channel: the one is electronic noise arises from the read head and pre-amplifier, which is usually modeled as AWGN; the other is media noise because of the granularity or particularity of the media, which is the dominant noise for high recording density[5]. The media noise also called transition noise because the noise is always induced during the signal transition progress. The media noise has high correlation with the media materials and the inputting data [6-8].

There are some researches on the study of media noise. One of the famous and physically based models is the micro-track model[9]. In the model, the media noise is composed of three noises: position jitter noise, pulse amplitude and width jitter noise, partial erasure noise. The model is complicated, and it is derived from actual observation. And it has several simplified version, such as Nair-Moon model[10, 11], Yamauchi-Lee-Cioffi model [12, 13]and so on. Later, we will show a

simplified, easy to implement channel model of perpendicular magnetic recording system. This model is derived by making tradeoff between implementation complexity and actual observation. Before introducing the simplified model, we first give some basic definition of perpendicular recording channel.

$g(t)$: The single side response of one bit during transition¹;

$h(t)$: The dibit response of one bit during transition, so $h(t) = g(t) - g(t - T_s)$;

In the perpendicular magnetic recording systems,

$$g(t) = A \cdot \tanh\left(\frac{\text{Log}(3)t}{T_{50}}\right) \quad (1.1)$$

Where, A is the amplitude of the response, and T_{50} is the time duration when the response from $-\frac{A}{2}$ to $\frac{A}{2}$ (or from $\frac{A}{2}$ to $-\frac{A}{2}$). Usually, T_{50} is combined with the sampling period T_s of the magnetic recording system to describe the recording density, where there is another parameter $D_u = \frac{T_{50}}{T_s}$.

So, if there is no media noise, the channel response should be:

$$y(t) = \sum_{K=-\infty}^{K=\infty} u_k h(t - kT_s) + N(t) \quad (1.2)$$

In the simplified channel model of perpendicular magnetic recording system, the media noise is simplified to be a transition jitter noise. The transition jitter noise has a zero mean, and always modeled as Gaussian distributed, though it's actually not. So if we add this noise, the channel response should be:

$$y(t) = \sum_{K=-\infty}^{K=\infty} u_k h(t - kT_s + \Delta) + N(t) \quad (1.3)$$

Where Δ is the jitter noise, which has a distribution as $N(0, \delta_j^2)$. By further simplification, (1.3) could be reduced to (1.4) using Taylor expansion:

$$y(t) = \sum_{K=-\infty}^{K=\infty} u_k \left(h(t - kT_s) + \Delta g'(t - kT_s) \right) + N(t) \quad (1.4)$$

¹ The response is a strictly physically based response, dependent on the read head, the media and so on.[14-16]

Where $g'(t) = \frac{dg(t)}{dt}$

So, the simplified channel model of perpendicular magnetic recording channel is as Fig. 2:

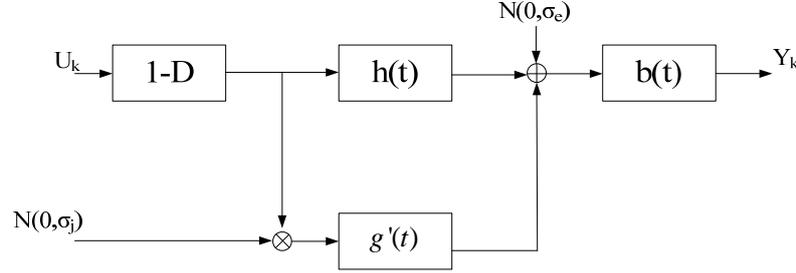


Fig. 2 Simplified readback channel model

In this model, there are two noises, which could both be implemented using Gaussian variables. The whole noise is composed of the two noise by fraction, which is variable according to different recording density. So the SNR of the model is:

$$SNR = 10 \log_{10} \left(\frac{A^2}{\sigma_e^2 + \sigma_j^2 \|g'(t)\|^2} \right) = 10 \log_{10} \left(\frac{A^2}{\sigma_e^2 + \frac{1-\beta}{\beta} \sigma_e^2 \|g'(t)\|^2} \right) \quad (1.5)$$

Where $\beta = \frac{\sigma_e^2}{\sigma_e^2 + \sigma_j^2}$.

References:

- [1] S. Wang and A. Taratorin, *Magnetic information storage technology*: Academic Press, 1999.
- [2] Y. Okamoto, H. Osawa, H. Saito, H. Muraoka, and Y. Nakamura, "Performance of PRML systems in perpendicular magnetic recording channel with jitter-like noise," *Journal of Magnetism and Magnetic Materials*, vol. 235, pp. 259-264, 2001.
- [3] E. Kretzmer, "Generalization of a Technique for Binary Data Communication," *Communication Technology, IEEE Transactions on*, vol. 14, pp. 67-68, 1966.
- [4] R. D. Cideciyan, J. D. Coker, E. Eleftheriou, and R. L. Galbraith, "Noise predictive maximum likelihood detection combined with parity-based post-processing," *Magnetics, IEEE Transactions on*, vol. 37, pp. 714-720, 2001.
- [5] R. D. Cideciyan, E. Eleftheriou, and T. Mittelholzer, "Perpendicular and longitudinal recording: a signal-processing and coding perspective," *Magnetics, IEEE Transactions on*, vol. 38, pp. 1698-1704, 2002.
- [6] Y. Nishida, H. Sawaguchi, A. Kuroda, H. Takano, H. Aoi, and Y. Nakamura, "Noise characteristics of double-layered perpendicular media," *Journal of Magnetism and Magnetic Materials*, vol. 235, pp. 454-458, 2001.
- [7] Y. Okamoto, H. Sumiyoshi, T. Kishigami, M. Akamatsu, H. Osawa, H. Saito, H. Muraoka, and Y. Nakamura, "A study of PRML systems for perpendicular recording using double layered

- medium," *Magnetics, IEEE Transactions on*, vol. 36, pp. 2164-2166, 2000.
- [8] M. Madden, M. Oberg, Z. Wu, and R. He, "Read channel for perpendicular magnetic recording," *Magnetics, IEEE Transactions on*, vol. 40, pp. 241-246, 2004.
- [9] J. Caroselli, "Modeling, analysis, and mitigation of medium noise in thin film magnetic recording channels," University of California, San Diego, 1998.
- [10] A. Barany and H. Bertram, "Transition noise model for longitudinal thin-film media," *Magnetics, IEEE Transactions on*, vol. 23, pp. 1776-1788, 1987.
- [11] S. Nair, H. Shafiee, and J. Moon, "Modeling and simulation of advanced read channels," *Magnetics, IEEE Transactions on*, vol. 29, pp. 4056-4058, 1993.
- [12] L. Inkyu, T. Yamauchi, and J. M. Cioffi, "Performance comparison of receivers in a simple partial erasure model," *Magnetics, IEEE Transactions on*, vol. 30, pp. 1465-1469, 1994.
- [13] T. Yamauchi and J. M. Cioffi, "A nonlinear model for thin film disk recording systems," *Magnetics, IEEE Transactions on*, vol. 29, pp. 3993-3995, 1993.
- [14] H. Bertram, *Theory of magnetic recording*: Cambridge University Press, 1994.
- [15] A. Hoagland, *Digital magnetic recording*: Wiley, 1963.
- [16] M. P. Veal and J. M. F. Moura, "Magnetic recording channel model with intertrack interference," *Magnetics, IEEE Transactions on*, vol. 27, pp. 4834-4836, 1991.